


SURFACE RESTORATION  
SEE PUBLIC WORKS STANDARD DETAIL SC-30

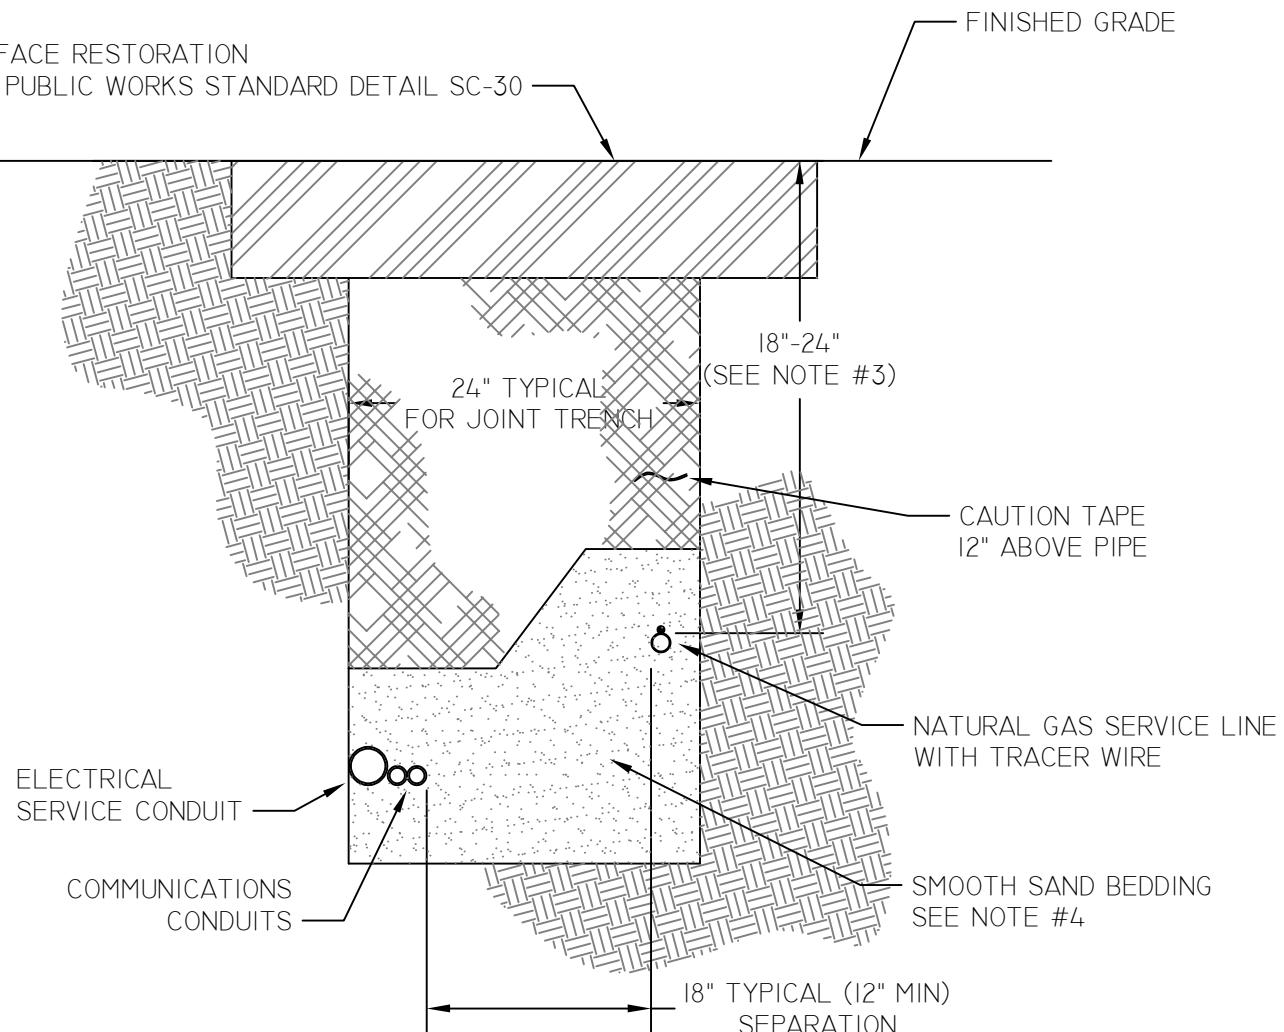

GENERAL NOTES:

- 1) A COMPREHENSIVE LIST OF TRENCHING REQUIREMENTS IS FOUND IN SECTION ELEVEN OF THE GAS DIVISION OPERATION AND MAINTENANCE MANUAL.
- 2) THE WIDTH OF TRENCH MUST BE SUFFICIENT TO ALLOW SOME SNAKING OF THE PIPE FOR EXPANSION AND CONTRACTION WHILE MAINTAINING MINIMUM SEPARATION FROM OTHER UTILITIES.
- 3) THE MINIMUM DEPTH FOR A GAS SERVICE LINE IS 18-INCHES ON PROPERTY AND 24-INCHES WITHIN RIGHT-OF-WAY.
- 4) SMOOTH SAND BEDDING IS REQUIRED AND MUST BE A MINIMUM OF 6-INCHES BELOW AND 6-INCHES ABOVE THE PIPE. MAINTENANCE SAND MAY NOT BE USED AS SAND BEDDING/COVER.
- 5) BACKFILLING MUST BE COMPLETED AT THE TIME THE GAS SERVICE LINE IS INSTALLED.

REVISED 12-02-22



CITY OF ELLensburg  
STANDARD PLANS & DETAILS

SERVICE LINE  
TRENCH REQUIREMENTS

PLAN NO.  
**G-13**

DRAWN BY: MB DATE: 07-19-01 UPDATED BY: DY SCALE: NONE